


# Mini Entry Access Panels

## Outdoor Call Initiation Modules

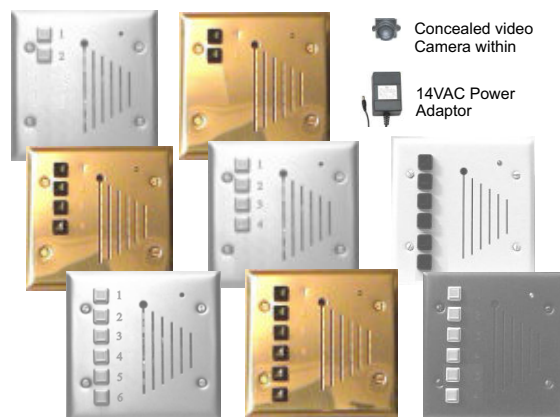

## Models

**EAP-2:** Two button Panel. Initiates calls to 2 suites.

**EAP-4:** Four-button Panel. Initiates calls to 4 suites.

**EAP-6:** Six-button Panel. Initiates calls to 6 suites.

## Finish

All models are available in Brushed Stainless Steel (SS), Polished Brass (PB), White Powder Coating (WT) or Black Powder Coating (BK). Numbers are engraved on faceplates. Complete model numbers are as follow:

EAP-2SS.....2-button Brushed Stainless Steel  
EAP-2PB.....2-button Polished Brass  
EAP-2BK.....2-button Sandy Black  
EAP-2WT.....2-button Sandy White  
EAP-4SS.....4-button Brushed Stainless Steel  
EAP-4PB.....4-button Polished Brass  
EAP-4BK.....4-button Sandy Black  
EAP-4WT.....4-button Sandy White

EAP-6SS.....6-button Brushed Stainless Steel  
EAP-6PB.....6-button Polished Brass  
EAP-6BK.....6-button Sandy Black  
EAP-6WT.....6-button Sandy White

## Video Option

All models optionally house a concealed B&W video camera powered by the very Panel for video monitoring. The video output from the camera connects to either a Video Distributor or a Modulator. Modulator allows video monitoring from resident's TV sets.

## Operation

These Entry Access Panels may be used either with the OmniCom system or the PhoneBell mini systems. They are equipped with one or two doorstrike ports in order to lock and unlock the controlled entry door(s). May be configured to directly power the doorstrike or control an external strike circuit.

## Specifications

Power Source: 120VAC ~ 50/60 Hz ~ 800 mA  
Output Power to Doorstrike: 14V AC - 15W  
Maximum output current to Doorstrike: 500 mA  
Maximum voltage feed: 36V AC or 36V DC (unpolarized feed)  
Maximum current consumption: 20 mA (without Cam)  
Relay contact ratings: 3A @ 250V AC  
Weight: 3 lbs. (EAP-6)  
Operating Environment: 41° F - 95 ° F

Size of faceplate: **W** 5 9/16 in. x **H** 5 9/16 in.  
Size of enclosure: **W** 4 2/16 in. x **H** 4 2/16 in. x **D** 2 3/16 in  
Mount: Flush-mount only

All operating features and specifications subject to change without notice.  
Copyright © Quantometrix, Inc., 2003  
www.quantometrix.com - 1- 800-766-0266